

D8520 | Extreme Dome 5MP Motorized Outdoor IR Camera

www.zavio.com

ZAVIO
Innovating IP since 2006



- 1/1.8" 5MP Starlight CMOS sensor
- Motorized lens 3.6-10mm, F1.5, P-Iris
- Smart Codec + H.265
- 5MP @ 30fps
- 100dB WDR
- Smart Focus
- 40m IR range with Adaptive IR
- Built-in fan
- Operating conditions -50~ 60°C
- Anti-Scratch Glass Coating
- SD/SDHC/SDXC card slot up to 128GB
- 2 alarm in / 2 alarm out
- 12V DC & PoE (802.3af/at)
- IP67 & IK10
- ONVIF 2.4 & Profile S

ZAVIO D8520 dome camera has it all. Latest H.265 compression to cut bandwidth in half, with ZAVIO's smart codec feature further lowering bandwidth and storage consumption to 80% less than normal H.264 cameras. Class-leading WDR to handle the most challenging lighting conditions. Superior low-light sensitivity that still sees when you don't. Adaptive IR that not only automatically adjusts the power of the IR illuminators, but also it's angle, to fit the view angle of the motorized lens, which can be easily focused by the Smart Focus function. Built-in fan allow the camera to operate in the most extreme environments (-50°C to 60°C).

The D8520 can be used in all kinds of applications, ranging from traffic, airports to public area surveillance and extreme applications. To benefit from the camera's maximum potential, please use with ZAVIO NVRs and Management Software Z+. They provide seamless integration with ZAVIO IP cameras, featuring embedded camera settings and batch maintenance. Download ZAVIOR mobile APP to get instant access to your devices and manage them anytime anywhere.

Optional accessories

Accessory: Wall mount
Item number: AD-M03
Dimensions: 200 x 127mm
Compatible with: D8220, D8520

Wall mount




D8520 with wall mount



Features

Smart Codec + H.265

ZAVIO Smart Codec + H.265 reduces bandwidth and storage requirements by a stunning 80% compared to standard H.264 camera.

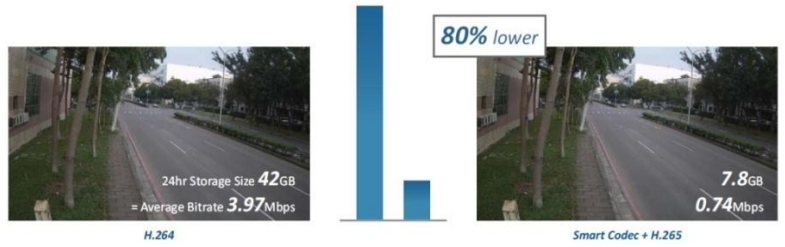

WDR off



WDR on


WDR

Cameras with WDR will take multiple exposures of the full scene and merge them together to provide an image that extends further than the human eye can perceive.

Adaptive IR

Provides 2 dimensions adaptation:

- 1) The angle of the IR illuminators automatically changes in sync with the camera's zoom position.
- 2) The brightness of the IR illuminators automatically adjusts to the scene content, effectively avoiding overexposure of objects that are too close to the camera.

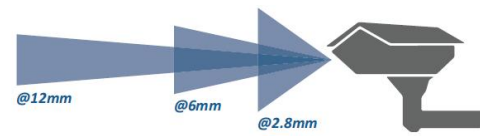

Adaptive IR: Off



Adaptive IR: On



Conventional



P-iris

P-iris

P-iris allows objects at different distances from the camera to be focused simultaneously - providing images with better contrast, clarity, resolution and depth of field.

ROI (Region Of Interest)

Defining a Region Of Interest will allow you to spend less bandwidth in areas that are less important while relocating resolution on the most relevant areas.



Features

High Performance IR

With a few high performance IR LEDs, the camera is able to achieve IR range of up to 40meters distance without flashlight effect. Two IR LEDs for achieving wide angle illumination and seven on each side for achieving longer distance.



Smart Focus control button

Smart Focus control buttons make installation much easier by allowing you to adjust the focus on site. Combined with the video output, you have everything you need to finish installation then and there.



Anti-Scratch Glass Coating

The hard coating makes the glass a lot more scratch-resistant, allowing installation to be less worrying.



Built-in Fan

Additional to being weatherproof (IP67), the camera also is designed with a built-in fan, allowing the camera to operate under extreme environments (-50°C to 60°C).

Technical Specifications

Camera


Camera Type	5MP Motorized Outdoor IR Dome
Image sensor	1/1.8" CMOS sensor
Lens	Motorized 3.6-10mm, F1.5, P-iris
Horizontal view angle	85° - 38°
IR working distance	40m effective range with Adaptive IR
Min	0.05 lux @ F1.5 (color) 0.005 lux @ F1.5 (B/W)
WDR	100dB
Day/Night function	Mechanical IR cut filter, Light sensor

Video & Audio

Resolutions	Motion JPEG/H.264/H.265: 2 Profile from 2560 x 1920 to 640 x 360 (total 6 resolutions) 2 Profile from 640 x 480 to 640 x 360 (total 2 resolutions)
Video compression	Motion JPEG H.264 baseline/ main profile/high profile H.265
Frame rate	H.265/H.264: up to 60 fps at 1080p, 30fps at 5MP Motion JPEG : up to 30 fps at 1080p, 10fps at 5MP
Video	Simultaneous Motion JPEG, H.264, H.265 Controllable frame rate and bandwidth Support unicast and multicast (RTSP)
Image settings	Rotation: mirror, flip, mirror flip, corridor mode Brightness, contrast, saturation, sharpness Overlay capabilities: time, date, text and privacy Image ROI, White balance (auto/manual) 3D DNR Defog
Audio support	Two-way (full duplex)
Audio compression	G.711 u law, a law, G.726, AMR

I/O & Connector

Ethernet	RJ-45 Ethernet 10/100 Base -T
Power Supply	Terminal block, 12V DC, 1.5A Power consumption: Max 15.1W PoE(Power over Ethernet) built-in IEEE 802.3af/at
Alarm I/O	Terminal block, 2/2
Audio connector	Terminal block, line in & line out
Analog video output	RCA
RS-485	Terminal block - Optional* (alarm I/O will only support 1/1)
Edge storage	SD/SDHC/SDXC up to 128GB
Buttons	Reset push button, Smart Focus control buttons
Other(s)	NTSC / PAL switch

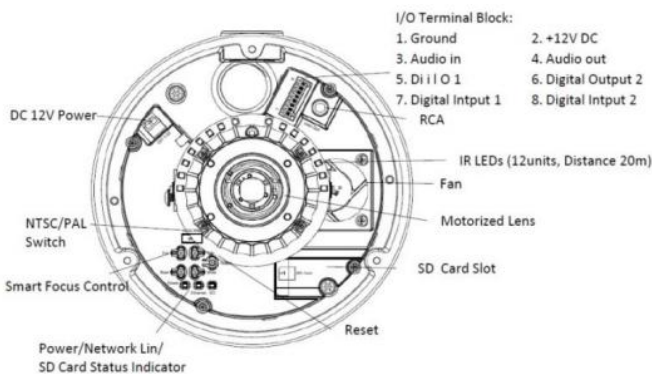

Alarm & Event

Event type	Alarm input, motion detection, audio detection, periodical, network link down, tampering, tripwire, people density, perimeter.
Alarm action	Network storage, edge storage, FTP, SMTP, HTTP event, HTTPS, alarm out pre and post event image.

Network

Users	10 simultaneous users
Security	Multiple user access levels with password protection, HTTPS encryption
Supported protocols	IPv4, IPv6, Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP
ONVIF	2.4 & Profile S

General

Housing	Aluminum Alloy
Ingress Protection	IP67 rated weatherproof housing
Impact Protection	IK10 rated vandalproof housing
Other(s)	Anti-Scratch Glass Coating Built-in Fan
Operating conditions	Starting temperature: -40 ~ 60°C Humidity 10-100% RH Working temperature: -50 ~ 60°C Humidity 10-100% RH
Dimensions	φ165 x 125mm
Weight	1670g excl. power supply
Included accessories	Quick installation guide, mounting and connector kit.
Optional accessories	Wall mount AD-M03
Certification	CE, FCC, RoHS
Language	Chinese, Croatian, Czech, Danish, Dutch, English, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Slovak, Spanish, Swedish, Turkish

System Requirements

Operating system	Windows XP / 7 / 8 / 8.1, MAC OS, Linux
Browser	Internet Explorer 9 / 10 / 11, Chrome, Firefox, Safari

Software

Video management software	ZAVIO CamGraba 2.0 IP System software, for viewing, recording and archiving up to 64 cameras.
Installation, management and maintenance	ZAVIO Installation Tool makes camera management easier camera image preview, firmware upgrade of multiple cameras, reset cameras to default while keeping network settings, etc.

