

P8220 | Speed Dome 2MP Outdoor IR Speed Dome

www.zavio.com

ZAVIO
Innovating IP since 2006



- 1/2.8" 2MP Starlight CMOS sensor
- 20x Optical Zoom
- Smart Codec + H.265
- 1080p @ 30fps
- 120dB WDR
- 150m IR range with Adaptive IR
- ROI (Region Of Interest)
- Defog
- Operating conditions -40~ 60°C
- MicroSD/SDHC/SDXC card slot up to 128GB
- Two-way audio
- 2 alarm in / 1 alarm out
- 24V DC & PoE (802.3at)
- IP66 weatherproof
- ONVIF 2.4 & Profile S


The ZAVIO P8220 is an Outdoor IR Speed Dome Camera, featuring 2MP resolution, 20x optical zoom, 150m IR distance, and latest H.265 compression to cut bandwidth in half, with ZAVIO's smart codec feature further lowering bandwidth and storage consumption to 80% less than normal H.264 cameras. Sony 1/2.8" starlight sensor and class-leading WDR to handle the most challenging lighting conditions. Featuring Adaptive IR that not only automatically adjusts the power of the IR illuminators, but also it's angle, to provide the best image possible.

To benefit from the camera's maximum potential, please use with ZAVIO NVRs and Management Software Z+. They provide seamless integration with ZAVIO IP cameras, featuring embedded camera settings and batch maintenance. Download ZAVIOR mobile APP to get instant access to your devices and manage them anytime anywhere.

Features

Smart Codec + H.265

ZAVIO Smart Codec + H.265 reduces bandwidth and storage requirements by a stunning 80% compared to standard H.264 camera.

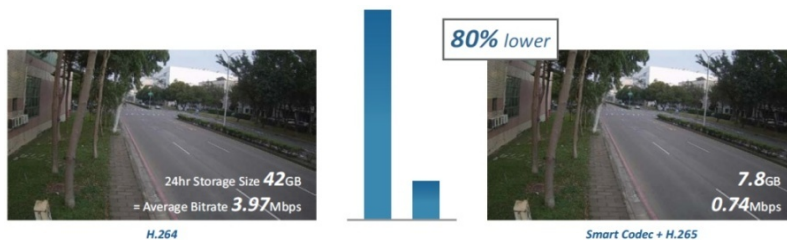

WDR off



WDR on



WDR

Cameras with WDR will take multiple exposures of the full scene and merge them together to provide an image that extends further than the human eye can perceive.

Adaptive IR

ZAVIO Adaptive IR provides 2 dimensions adaptation:

- 1) The angle of the IR illuminators automatically changes in sync with the camera's zoom position.
- 2) The brightness of the IR illuminators automatically adjusts to the scene content, effectively avoiding overexposure of objects that are too close to the camera.

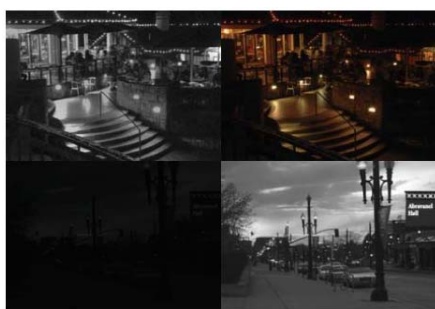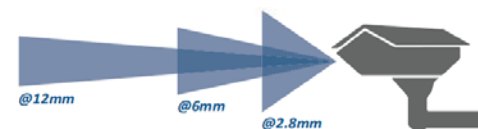

Other Cameras

ZAVIO Starlight Cameras

Starlight

Combined with cutting-edge sensor technology, advanced noise reduction and high frame rate, Starlight cameras can capture highly detailed color images of fast moving objects even under challenging lighting conditions.

ROI (Region Of Interest)

Defining a Region Of Interest will allow you to spend less bandwidth in areas that are less important while relocating resolution on the most relevant areas.



Technical Specifications

Camera

| | |
|-----------------------|---|
| Camera Type | 2MP Outdoor IR Speed Dome |
| Image sensor | 1/2.8" Starlight CMOS sensor |
| Lens | 5.5-110mm, F1.6(W)-3.5(T) |
| Horizontal view angle | 51° - 2.60° |
| IR working distance | 150m effective range with Adaptive IR |
| Min | 0.001 lux @ F1.6 (color) 0.0001 lux @ F1.6 (B/W) |
| WDR | 120dB |
| Day/Night function | Mechanical IR cut filter, Light sensor |

Video & Audio


| | |
|-------------------|---|
| Resolutions | Motion JPEG/H.264/H.265: 2 Profile from 1920 x 1080 to 320 x 240 (total 5 resolutions) 2 Profile from 640 x 480 to 320 x 240 (total 3 resolutions) |
| Video compression | Motion JPEG H.264 baseline/ main profile/high profile H.265 |
| Frame rate | H.265/H.264: up to 30 fps at 1920 x 1080 Motion JPEG : up to 30 fps at 1920 x 1080 |
| Video | Simultaneous Motion JPEG, H.264, H.265 Controllable frame rate and bandwidth Support unicast and multicast (RTSP) |
| Image settings | Rotation: mirror, flip, mirror flip Brightness, contrast, saturation, sharpness Overlay capabilities: time, date, text and privacy Image ROI, White balance (auto/manual) 3D DNR Defog |
| Audio support | Two-way audio |
| Audio compression | G.711A |

PTZ Mechanism

| | |
|-----------------|---|
| Pan Range | 360° continuous rotation |
| Max. Pan Speed | 180° /s |
| Tilt Range | 0° ~ 90° |
| Max. Tilt Speed | 100° /s |
| Zoom Ratio | 20X Optical Zoom |
| Max. Zoom Speed | Approx. 4.5s (Tele ~ Wide) |
| Preset Points | Up to 256 preset points |
| Sequence Group | 1. Up to 8 groups 2. One group can include up to 8 preset points |

Alarm & Event

| | |
|--------------|--|
| Event type | Alarm input, motion detection, audio detection, periodical, network link down. |
| Alarm action | Network storage, edge storage, FTP, SMTP, HTTP event, HTTPS, alarm out pre and post event image. |

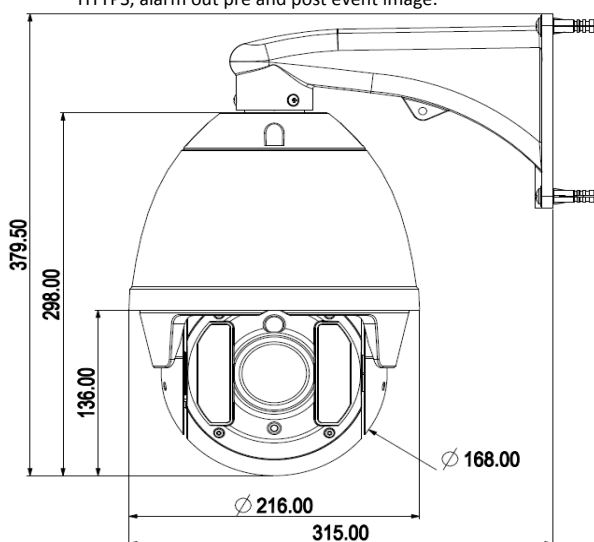
ZAVIO

 ZAVIO Inc. | 2F., No.24-2, Gongye E. 4th Rd., East Dist., Hsinchu City 300, Taiwan
www.zavio.com | TEL: 886-3-579-0275 | FAX: 886-3-668-6845 | E-Mail: sales@zavio.com

I/O & Connector

| | |
|---------------------|--|
| Ethernet | RJ-45 Ethernet 10/100 Base -T |
| Power Supply | Terminal block, 24V DC Power consumption: Max 36W PoE(Power over Ethernet) built-in IEEE 802.3at |
| Alarm I/O | Terminal block, 2/1 |
| Audio connector | RCA |
| Analog video output | BNC |
| RS-485 | - |
| Edge storage | Micro SD/SDHC/SDXC up to 128GB |
| Buttons | Reset push button |

Network

| | |
|---------------------|--|
| Users | 10 simultaneous users |
| Security | Multiple user access levels with password protection, HTTPS encryption |
| Supported protocols | IPv4, IPv6, Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP |
| ONVIF | 2.4 & Profile S |

General

| | |
|----------------------|---|
| Housing | Aluminum Alloy |
| Ingress Protection | IP66 rated weatherproof housing |
| Impact Protection | - |
| Other(s) | - |
| Operating conditions | Starting temperature: -20 ~ 60°C Humidity 10-100% RH Working temperature: -40~ 60°C Humidity 10-100% RH |
| Dimensions | φ216 x 379.5mm |
| Weight | 6.7kg |
| Included accessories | Quick installation guide, wall mount, mounting and connector kit. |
| Certification | CE, FCC, RoHS |
| Language | Chinese, Croatian, Czech, Danish, Dutch, English, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Polish, Portuguese, Russian, Slovak, Spanish, Swedish, Turkish |

System Requirements

| | |
|------------------|--|
| Operating system | Windows XP / 7 / 8 / 8.1, MAC OS, Linux |
| Browser | Internet Explorer 9 / 10 / 11, Chrome, Firefox, Safari |

